

C

BT




5 ,8-
 PIN
 IP66/67
 (NEMA 4X)
 FRT
 EB

BT -

PIN

BT

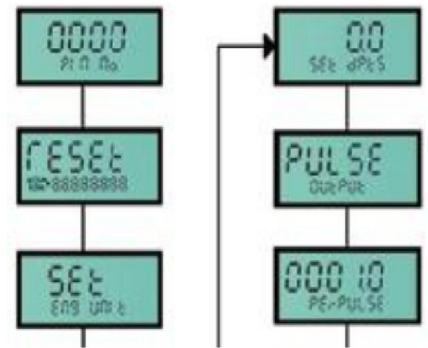


3.6
 8~24Vdc.

NPN/PNP



(LCD)	-	LCD
	5 x 7.5	3
	8 x 7.5	3
	,	,
	P-P min.),	(15mV)
M	5	2.5, 250
	0.001-9,999,999.999	3
	NPN/PNP -	(5 .) 60
	-20~+80°C ,	
	1 x 3.6 V	10 .
	= 8-24 (drives output & backlighting)	
()	Exia IIB T4	
	IP66/67 (NEMA 4X)	175
		3-6mm
Mo		

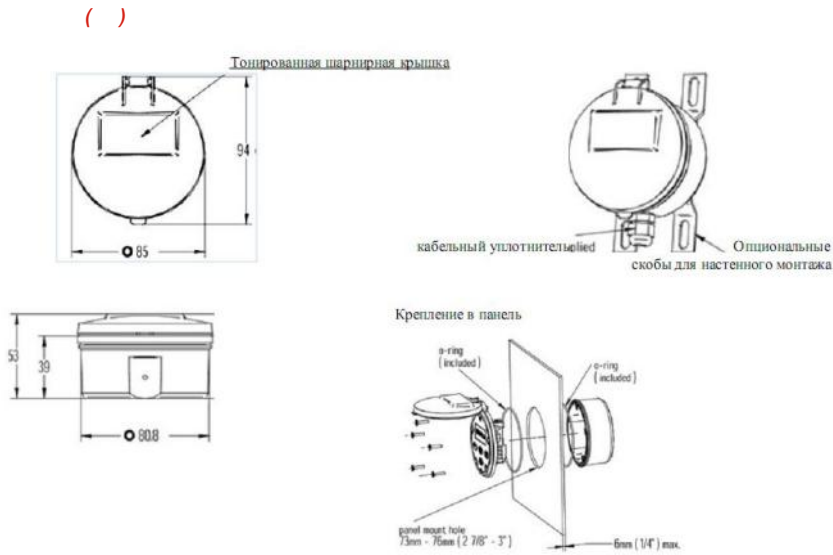

FMBT110D0 ()

FM (, , ,)
MM

I Exia IIB T4
B ()

AWM	- (.)	ATM	.
APM	- (.)	AUS	
ACF		ACG	

